

Pressure transmitters for industrial applications

Type MBS 4500

Features



- Designed for use in severe industrial environments
- Enclosure and wetted parts of acid-resistant stainless steel (AISI 316L)
- Pressure ranges in relative (gauge) or absolute from 0 up to 600 bar
- Output signal: 4 - 20 mA
- A wide range of pressure connections
- Temperature compensated and laser calibrated
- Accuracy 0,5% FS
- Zero and span adjustment

Description

The high accuracy pressure transmitter MBS 4500 is designed for use in almost all industrial applications, and offers a reliable pressure measurement, even under harsh environmental conditions.

The flexible pressure transmitter programme covers a 4-20 mA output signal, absolute and gauge (relative) versions, measuring ranges from

0-1 to 0-600 bar zero and span adjustment. A rotatable plug connection and a wide range of pressure and electrical connections. Excellent vibration stability, robust construction, and a high degree of EMC/EMI protection equip the pressure transmitter to meet the most stringent industrial requirements.

Ordering

standard versions

Plug: Pg 9 (EN 175301-803)

Output: 4-20 mA

Pressure connection: G 1/4 A (EN 837)

Measuring range Pe ¹⁾ [bar]	Type no.	Code no.
0-1	MBS 4500-1011-1AB08	060G2401
0-1.6	MBS 4500-1211-1AB08	060G2402
0-2.5	MBS 4500-1411-1AB08	060G2403
0-4	MBS 4500-1611-1AB08	060G2404
0-6	MBS 4500-1811-1AB08	060G2405
0-10	MBS 4500-2011-1AB08	060G2406
0-16	MBS 4500-2211-1AB08	060G2407
0-25	MBS 4500-2411-1AB08	060G2408

¹⁾ Relative/ gauge

Technical data

Performance (EN 60770)

Accuracy (incl. non-linearity, hysteresis and repeatability)	±0.2% FS (typ.) ±0.5% FS (max.)	
Non-linearity BFSL (conformity)	≤ ±0.2% FS	
Hysteresis and repeatability	≤ ±0.1% FS	
Thermal zero point shift	≤ ±0.1% FS/10K (typ.) ≤ ±0.2% FS/10K (max.)	
Thermal sensitivity (span) shift	≤ ±0.1% FS/10K (typ.) ≤ ±0.2% FS/10K (max.)	
Response time	< 4 ms	
Overload pressure	6 × FS (max. 1500 bar)	
Burst pressure	> 6 × FS (max. 2000 bar)	
Durability, P: 10-90% FS	> 10×10 ⁶ cycles	
Zero point adjustment	0-1 to 0-10 bar measuring range	-5 to +20 % FS
	0-16 to 0-40 bar measuring range	-5 to +10% FS
	0-60 to 0-600 bar measuring range	-2.5 to +5% FS
Span adjustment	0-1 to 0-600 bar measuring range	-5 to +5% FS

Electrical specifications

Nom. output signal (short circuit protected)	4 to 20 mA
Supply voltage, U _B (polarity protected)	10 to 30 V dc
Supply voltage dependency	≤ ±0.05% FS/10 V
Current limitation (linear output signal up to 1.5 × rated range)	28 mA (typ.)
Load [R _L] (load connected to 0 V)	$R_L \leq \frac{U_B - 10 V}{0.02 A} [\Omega]$


Environmental conditions

Medium temperature range	-40 → +85 °C		
Ambient temperature range	-40 → +85 °C		
Compensated temperature range	0 → +80°C		
Transport temperature range	-50 → +85°C		
EMC - Emission	EN 61000-6-3		
EMC Immunity	EN 61000-6-2		
Insulation resistance	> 100 MΩ at 100 V		
Mains frequency test	SEN 361503		
Vibration stability	Sinusoidal	15.9 mm-pp, 5 Hz-25 Hz	IEC 60068-2-6
		20 g, 25 Hz - 2 kHz	
		Random 7.5 g _{rms} , 5 Hz - 1 kHz	IEC 60068-2-34, IEC 60068-2-36
Shock resistance	Shock	500 g / 1 ms	IEC 60068 - 2 - 27
	Free fall		IEC 60068 - 2 - 32
Enclosure	IP65		

Mechanical characteristics

Materials	Wetted parts	EN 10088-1; 1.4404 (AISI 316 L)
	Enclosure	EN 10088-1; 1.4404 (AISI 316 L)
	Electrical connections	Glass filled polyamid, PA 6.6
Weight (depending on pressure connection)	0.2 - 0.3 kg	

Ordering special versions



Measuring range

0 - 1 bar	1 0
0 - 1.6 bar	1 2
0 - 2.5 bar	1 4
0 - 4 bar	1 6
0 - 6 bar	1 8
0 - 10 bar	2 0
0 - 16 bar	2 2
0 - 25 bar	2 4
0 - 40 bar	2 6
0 - 60 bar	2 8
0 - 100 bar	3 0
0 - 160 bar	3 2
0 - 250 bar	3 4
0 - 400 bar	3 6
0 - 600 bar	3 8

Preferred versions

Non-standard build-up combinations may be selected. However, minimum order quantities may apply. Please contact your local Danfoss office for further information, or request on other versions.

Pressure reference

Gauge (relative)	1
Absolute	2

A B 0 4
A B 0 6
A B 0 8
A C 0 4
A C 0 8
G B 0 4

Pressure connection

G ¼ A (EN 837)
G 3/8 A (EN 837)
G ½ A (EN 837)
¼ -18 NPT
½ -14 NPT
DIN 3852-E-G ¼
Gasket: DIN 3869-14 NBR

Electrical connection



Figures refer to plug and standard PIN configuration - see page 4
Plug Pg 9 (EN175301-803)

Output signal

4 - 20 mA

Dimensions / Combinations

Type code	1
	EN175301-803, Pg 9

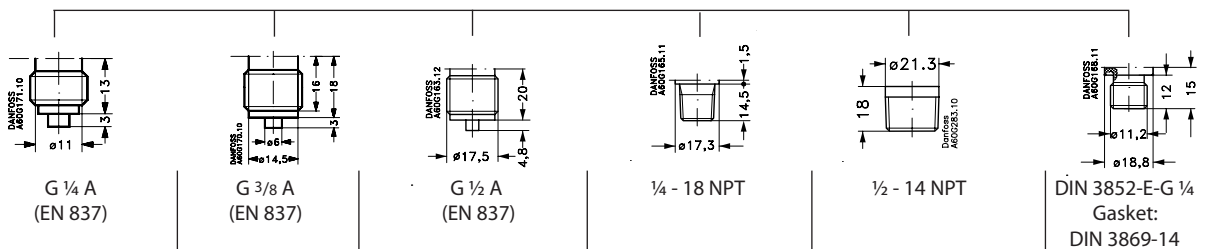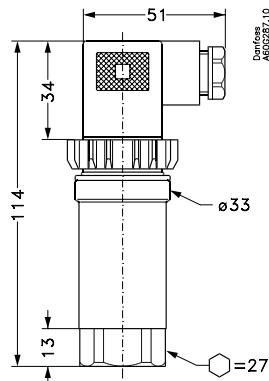

Type code	AB04	AB06	AB08	AC04	AC08	GB04
-----------	------	------	------	------	------	------

Electrical connection

Type code, page 3	<p>Electrical connection, 4 - 20 mA output (2 wire)</p> <p><i>Pin 1: + supply</i> <i>Pin 2: ÷ supply</i> <i>Pin 3: Not used</i></p> <i>Earth: Connected to MBS enclosure</i>
1	
EN 175301-803, Pg 9	

Adjustment

DANFOSS
AD0119.1.0

DANFOSS
AD0119.1.1

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.